

## 205.W119-D\*


Wall mounting box in halogen free plastic with  
1 socket Type 2 32A 400Vac 22kW with plug lock



### > FUNCTIONS

charge in mode 3 with pwm circuit pilot  
identification of connected cord-set size  
protection against direct contact Safety Child Shutters  
energy metering and current consumption  
managing of latching system  
remote control with smart-APP  
charge managing in case of power outage  
working in mode stand-alone free  
predisposition for serial communication  
wireless connection to Wi-Fi home  
POWER MANAGEMENT function embedded

### > DIMENSION

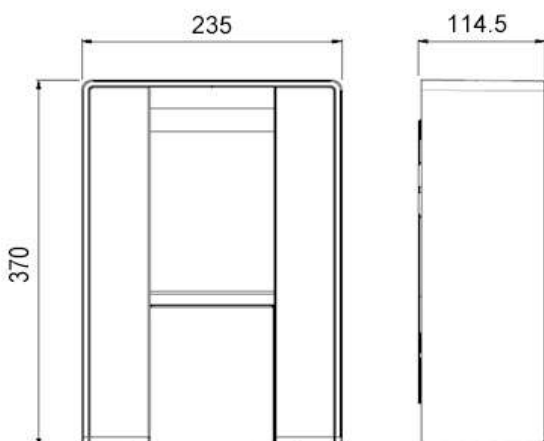

### > REFERENCE STANDARD

#### IEC/EN 61851-1

Electric vehicle conductive charging system.  
Part 1: General requirement.

#### IEC/EN 61439-7

Low-voltage switchgear and control gear assemblies.  
Part 7: Assemblies for e.v. charging stations.

### > TECHNICAL CHARACTERISTICS

Rated current:	<b>32A</b>
Rated voltage:	<b>400Vac</b>
Frequency:	<b>50-60Hz</b>
Insulating voltage:	<b>500V</b>
Protection degree:	<b>IP55</b>
Operating temperature:	<b>-30°C +50°C</b>
Material:	<b>Engineering plastic</b>
Glow wire test:	<b>650°C</b>
IK degree at 20°C:	<b>IK08</b>
Color:	<b>Anthracite</b>
Mounting:	<b>Wall mounting</b>
Salt mist:	<b>Resistant</b>
UV radiation:	<b>Resistant</b>

### > EQUIPMENTS

1 terminal strip 5x10mm<sup>2</sup>  
1 digital energy meter 3P+N 80A  
1 modular contactor 4P 40A 24Vdc  
1 DC Leakage detector  
1 fuse holder 1P+N gG 4A  
1 power supply 24Vdc 36W  
1 control card with Wi-Fi connection  
1 backup battery  
1 RGB led stripes

#### excluded:

upstream protections (by the installer):  
1 circuit breaker 3P+N C40 30mA ist. A

\*combination of the code material

Panel Graphics	
D	Scame Standard
DC	Custom